


MODEL

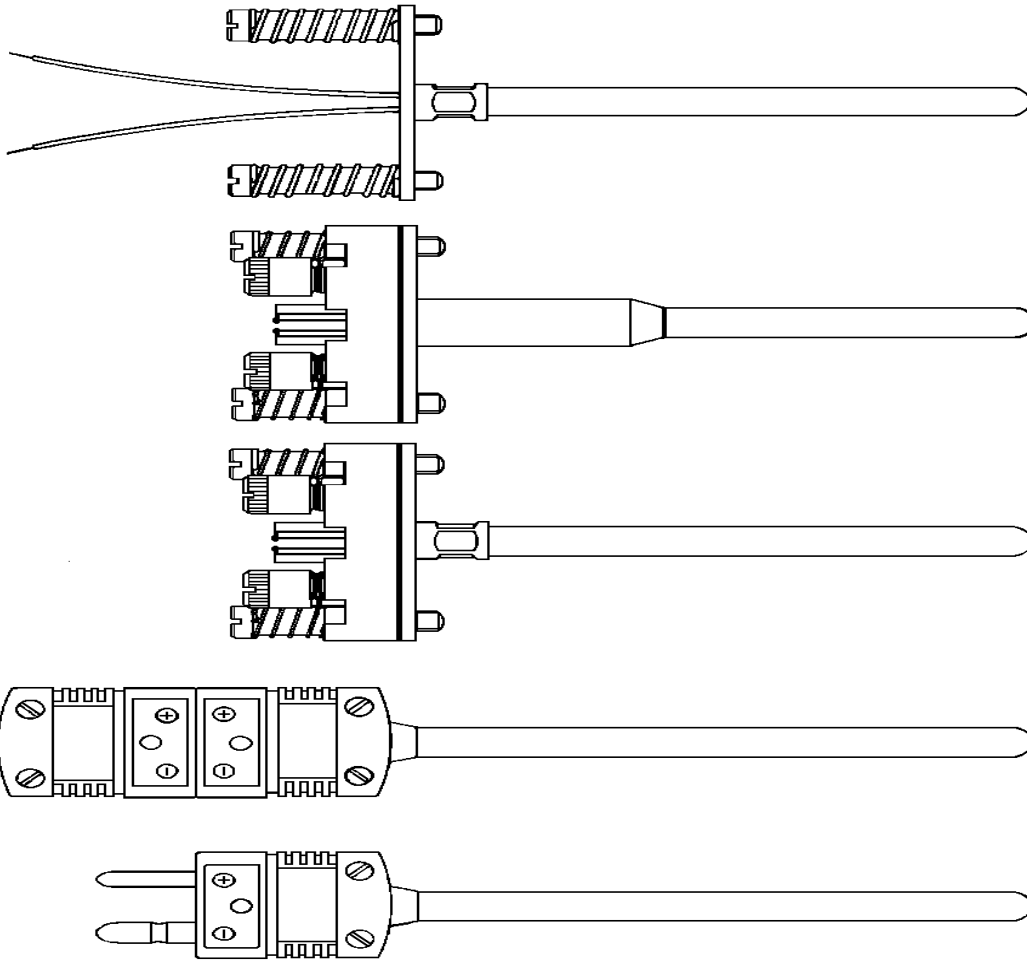


- I12
STD transmitter mounting
base

- I13
Ceramic terminal block
with collar

- I14
Ceramic terminal block

- I15
STD plug and socket

- I16
STD plug

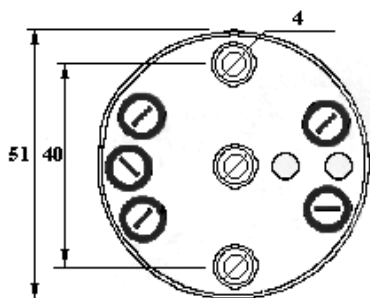

HEAD MOUNTING CONVERTER :

- TR01 **Linear not insulated and not prog. converter**
INPUT TC - RTD / OUT 4 - 20mA
- TR02 **Programable converter**
INPUT TC - RTD / OUT 4 - 20mA
- TR03 **Programable converter**
HART compatible, intrinsically safe.
INPUT TC - RTD / OUT 4 - 20mA